



#### Dimensions

<b>Width (external)</b>	1102.00 mm
<b>Depth (external)</b>	574.00 mm
<b>Height (external)</b>	600.00 mm
<b>Width (internal)</b>	979.00 mm
<b>Depth (internal)</b>	452.00 mm
<b>Height (internal)</b>	502.00 mm

The available internal dimensions can vary depending on the interior equipment package.

#### Weight / Load

<b>Weight without interior equipment</b>	180 kg
<b>Distributed load</b>	277.00 kg/m <sup>2</sup>
<b>Maximum load</b>	300 kg

#### Ventilation

<b>Extraction air</b>	50 DN
<b>minimum exhaust air quantity 10 times</b>	2 m <sup>3</sup> /h
<b>Pressure drop inside the cabinet</b>	1 Pa

#### Colouring / Surface finish

<b>Body colour code</b>	RAL 7035
<b>Body colour</b>	Light grey
<b>Body surface finish</b>	plain
<b>Door / Drawer colour code</b>	RAL 7035
<b>Door / Drawer colour</b>	Light grey
<b>Door / Drawer surface finish</b>	plain

#### General Information

<b>Number of drawers</b>	1
<b>Capacity drawer</b>	11.50 litres
<b>Customs tariff number</b>	94032080


#### Safety storage under bench cabinet UB-ST-90 Model UB90.060.110.ST, light grey (RAL 7035)

#### Safe and approved storage of flammable hazardous substances in working areas


#### Function / construction:

- **Robust construction and longevity:** body made of powder-coated sheet steel
- **User-friendly and safe:** door and drawer remain open in any position, interior of the cabinet completely visible — access to all containers, 93° opening of the wing door
- **Safe:** drawer fitted with earthing wire incl. clamp as standard, seal welded sump, drawers are self-closing in the event of fire
- **No unauthorised use:** door and drawer lockable with cylinder lock and locking state indicator (red/green)
- **Mobile:** castors with plinth (optionally available), easy moving of the cabinet
- **Ventilation:** integrated air ducts ready for connection (DN 50) to a technical exhaust system

Front view

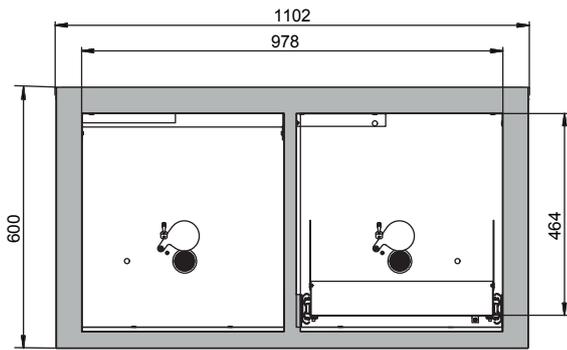

Side view

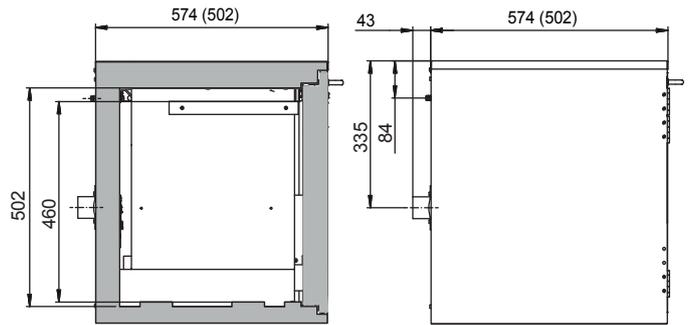

Top view

